



**DOD Technologies, Inc.**

Innovative Life Safety Systems & Services

## ChemLogic Single Point Continuous Monitor

### CL1



The ChemLogic Single Point Continuous Monitor provides field proven ChemLogic Technology for the quick detection of low level toxic and corrosive gases.

#### Feature

- ◆ New Intelligent Optics
- ◆ Optimized Flow System
- ◆ 2 Month Cassette
- ◆ ChemLogic Technology
- ◆ SD Memory Card
- ◆ Real Time Display
- ◆ Complete Front Access
- ◆ Touch Control
- ◆ Compact Size
- ◆ Remote Reset
- ◆ Tape Saver Mode

#### Benefit

- Reduced Maintenance and Risk of False Alarms
- Faster Response
- Reduced Operating Cost
- Field Proven Reliability
- Easily Retrievable Data
- Quick Real Time Information
- Easy to Service
- Easy to Startup & Operate
- Simple to Install
- Ideal for Process Applications
- Reduces Tape Usage During High Concentrations



The ChemLogic Continuous Single Point Gas Monitor is the next generation of interference free, low maintenance colorimetric gas detection. This system is simple to install and utilizes 1/4" tubing to allow the sample to be drawn up to 150feet(45m).

The ChemLogic Continuous Single Point Gas Monitor provides relay and analog outputs.

This new innovative gas detection system enables customers to experience advanced technology at a lower initial investment and reduced cost of ownership.

Innovative Life Safety Systems and Service




Contact DOD Technologies at Ph 815-788-5200 Fax 815-788-5300 [www.dodtec.com](http://www.dodtec.com)

## CL1 Technical Specifications

Detection Principal	ChemLogic Technology
Gas Families Available	See Below
Monitoring Points	1
Sample Distance	150ft(45m) 1/4" OD 1/8"ID Teflon FEP (Does not apply to Diisocyanates)
Exhaust Tubing	25ft(7.62m) 1/4"OD 3/16"ID
Display	HMI
Local Alarm Indication	Visual HMI Display
Relay Outputs	6Amps Form C - Programmable Low and High Level, Fault
Operating Temperature	40F to 104F (5C to 40C)
Dimensions	H-12.5"(317.5mm) W-10.3"(260mm) D- 9" (228mm)
Shipping Weight	30 lbs. 13.5 Kg
Operating Voltage	85-264VAC 50/60 Hz
Power Consumption	Less than 1 Amp
Enclosure	NEMA 4X
Analog Output	4-20ma (500 ohm max impedance)

<u>Hydrides</u>		<u>Mineral Acids</u>	
Arsine (AsH3)	0-50ppb, 0-500ppb	Hydrogen Chloride (HCl)	0-15ppm
Silane (SiH4)	0-50ppm	Hydrogen Fluoride (HF)	0-10ppm
Diborane (B2H6)	0-500ppb	Boron Trifluoride (BF3)	0-3200ppb
Phosphine (PH3)	0-1500ppb	Hydrogen Bromide (HBr)	0-20ppm
Hydrogen Sulfide (H2S)	0-90ppb, 0-500ppb, 0-1500ppb		
Germane (GeH4)	0-2000ppb		
Hydrogen Selenide (H2Se)	0-500ppb		
<u>Diisocyanates</u>		<u>Other</u>	
TDI	0-100ppb and 0-200ppb	Phosgene (COCl2)	0-300ppb, 0-900ppb, 0-3000ppb
MDI	0-100ppb and 0-200ppb	Chlorine (CL2)	0-5000ppb
HDI	0-100ppb	Velcorin	0-200ppb
IPDI	0-100ppb	Ammonia (NH3)	0-75ppm
		Acetic Acid (Low Level)	0-50ppb
		Hydrazine (N2H4)	0-500ppb

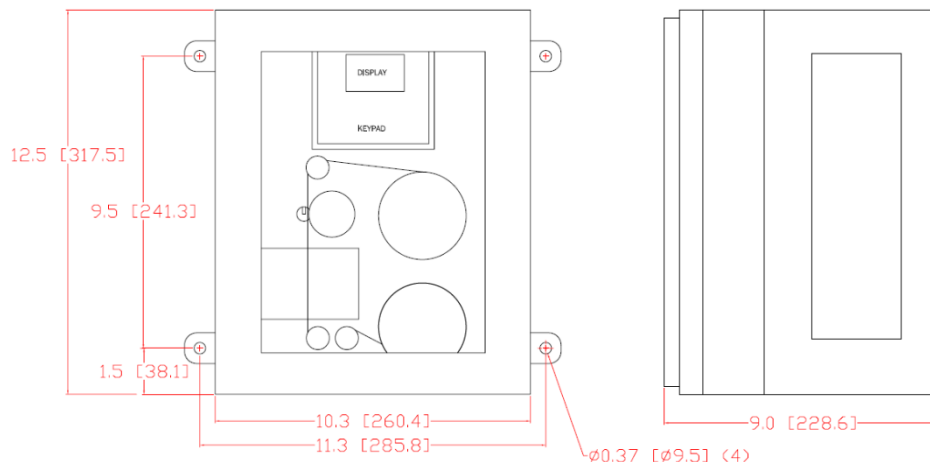

Contact DOD Technologies at Ph 815-788-5200 Fax 815-788-5300 [www.dodtec.com](http://www.dodtec.com)

Öä çã ããÀ KÖZÔÁc\} æ} æÁQ&ÁÁUÁQI cÁ JI ÁÁÖT [ cÉÁÁ ÎHFÉ  
ì €€Í GEGHÁG FJÈÌ Ì È Ì G ÁÁæÁG FJÈÌ Ì È Ì G ÁÁæÁ •O æ& qB { ÁÁ , , Èæ& qB { Á